

# NON-EXPOSURE REMOTE HEAD PINHOLE

HD IP PINHOLE CAMERA \_ NST9  
2MP / WDR / TDN / DC12V  
PoE / IP66 RATED



Overcoming  
Place  
Limits



## Installation anywhere without restrictions of location

The non-exposed camera is installed in the museum, gallery, store, hotel, etc. so that it has little affect existing interiors. It is easy to use even installation areas are small, such as the ATM, ticket machine, vending machine, health monitoring systems, etc.




It is separated into a main unit and a sensor unit consisting of 2MP sensor, 2.8/3.7mm pinhole lens, and 6.5M cable. By connecting a long cable to the main unit, the sensor unit can be installed even at a distance, providing a flexible monitoring position.



## Main Unit

The main unit includes network and power, input/output, sensor connections, reset button, and SD card slot.

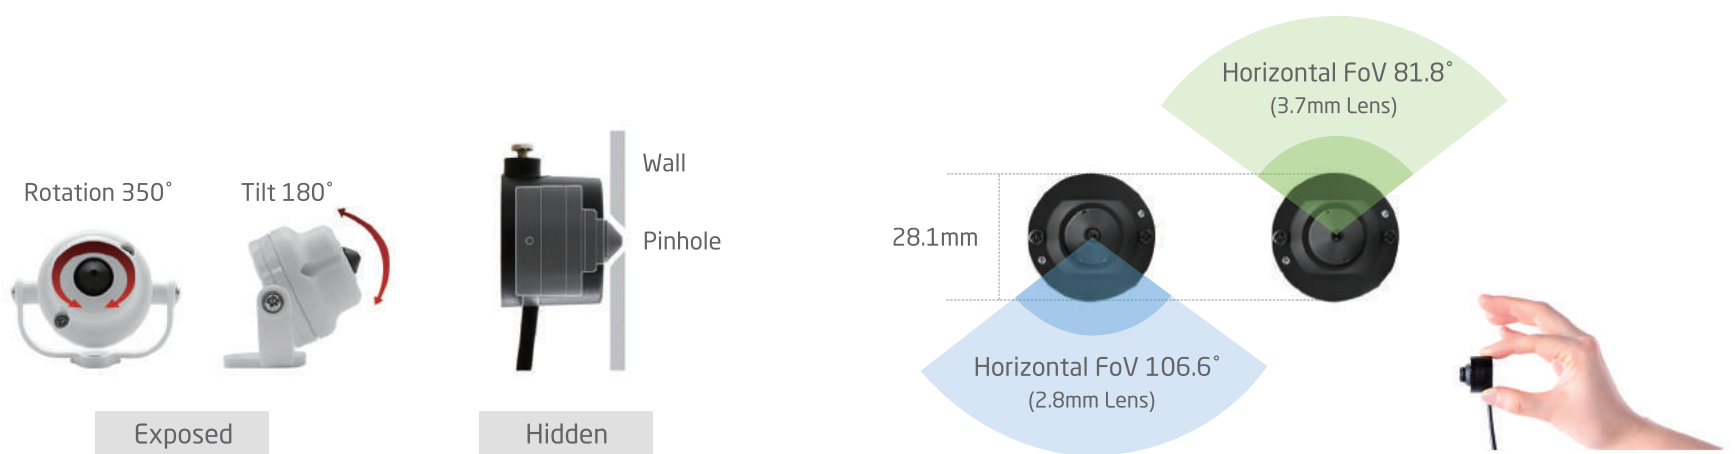

## Exposed and hidden brackets

Use the bracket to install on the entrance, wall, and ceiling. Rotate the exposed bracket and Tilt and install in the desired direction, and place the hidden bracket behind the wall and ceiling.

## Non-exposure surveillance over large areas

The ultra-small sensor unit is equipped with an invisible pinhole lens, enabling thorough non-exposure monitoring. Lens supporting horizontal angles up to 106.6° allow you to monitor large areas at a glance.